400i DYE SUB



The Future of Fume Extraction

FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Coalescing filter to collect and allow easy draining of excess fluid

SPECIFICATIONS

٠

Voltage	120v	230v 0LX4027	
Volume Part Number	0LX4028		
Wattage	1.2kW	1.2kW	
Frequency	50Hz / 60Hz	50Hz / 60Hz	
Cabinet Height	1070mm	1070mm	
Cabinet Width (inc drain valve)	585mm	585mm	
Cabinet Depth	528mm	528mm	
Cabinet Weight	63kg	63kg	
Sound Level	<60dBa	<60dBa	
Airflow	400m3/h	400m3/h	

Find out more:



🕑 +44 (0)1405 746030

INCLUDED AS STANDARD...

FILTERS



Main Filter Code 113505

Description HEPA/Chemical


Mu	4	ш	
		1	
		P	

Pre-filter Code 111057

Description F6 Labyrinth

CONNECTION KIT

Connection kit is included see overleaf for options

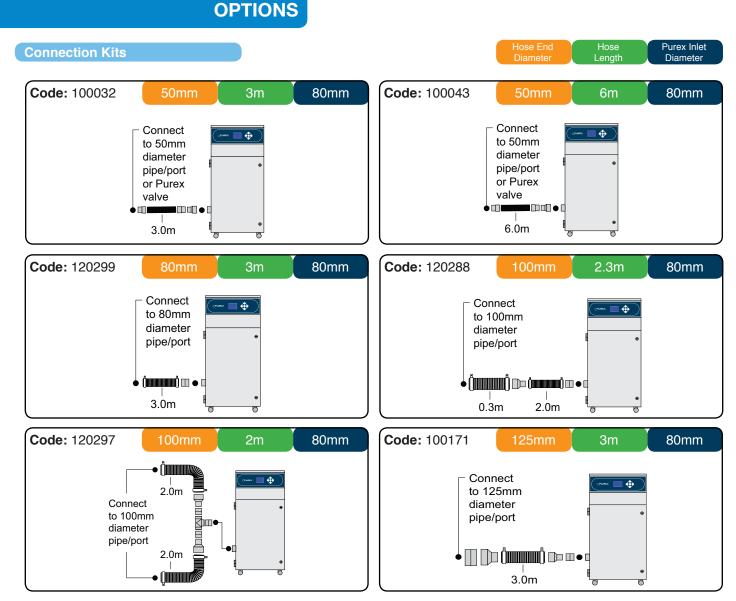

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing


Interfacing can remotely start the Purex machine when the connected machine starts. Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options

Technical

LEGEND:

- 1. Air inlet 80mm safe seal
- 2. Pre-filter Labyrinth bag
- 3. Main filter (HEPA location)
- 4. Main filter (carbon location)
- 5. Clean air returned to the workplace
- 6. Filter locking handles
- 7. Filter identification labels
- 8. Coalescing filter unit
- 9. Drain tap

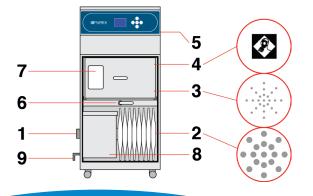

Purex International Limited QWP House, Island Drive Capitol Park, Thorne Doncaster, UK **DN8 5UE**

Registered Office: Purex International Limited, QWP House, Island Drive, Capitol Park, Thorne, Doncaster DN8 5UE Registered No. 5136616 England | VAT No. GB842 5025 49 | WEEE Producer Registration Number: WEE/CE0067T