

# 1750i PVC

Large, PVC specialized extraction unit

**PUREX**  
CLEAN AIR FOR EVERYONE



## Description & features

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow
- Specialized coating to prevent corrosion from PVC fumes

## Filters



Main Filter Code

110616-PVC

Description

HEPA/Chemical



Pre-Filter Code

110617

Description

Granular Pad PVC



Pre-Filter Code

111037

Description

F6 Labyrinth



Pre-Filter Code

200056

Description

Chemical  
Absorbant Pad

## Specification

	3 phase supply
<b>Voltage</b>	400v
<b>Part Number</b>	OPV2010D
<b>Wattage</b>	3kW
<b>Frequency</b>	50Hz / 60Hz
<b>Cabinet Height</b>	1400mm
<b>Cabinet Width</b>	725mm
<b>Cabinet Depth</b>	726mm
<b>Cabinet Weight</b>	170kg
<b>Airflow</b>	1750m <sup>3</sup> /h
<b>Sound Level</b>	<60dBa

## Machine supplied with

- 1 x Main Filter • 3 x Pre-filter • 1 x 4.5m Fixed Power Cable (no plug) • 1 x Manual

Find out more: [Wpurex.co.uk](http://Wpurex.co.uk) | [T +44 \(0\)1405 746030](tel:+44(0)1405746030) | [E purex@purex.co.uk](mailto:purex@purex.co.uk)

Registered Office: Purex International Limited, QWP House, Island Drive, Capitol Park, Thorne, Doncaster DN8 5UE  
Registered No. 5136616 England | VAT No. GB842 5025 49 | WEEE Producer Registration Number: WEE/CE0067TX  
\*Goods are subject to change | \*Illustrations are 3D created visual representations

# 1750i PVC

Large, PVC specialized extraction unit

# Options


## Pre-filter

Code	Description
111099	F8 / F9 Labyrinth

## Connecction Kit

Please contact Purex or your represnetative for PVC connection kits

## Technical

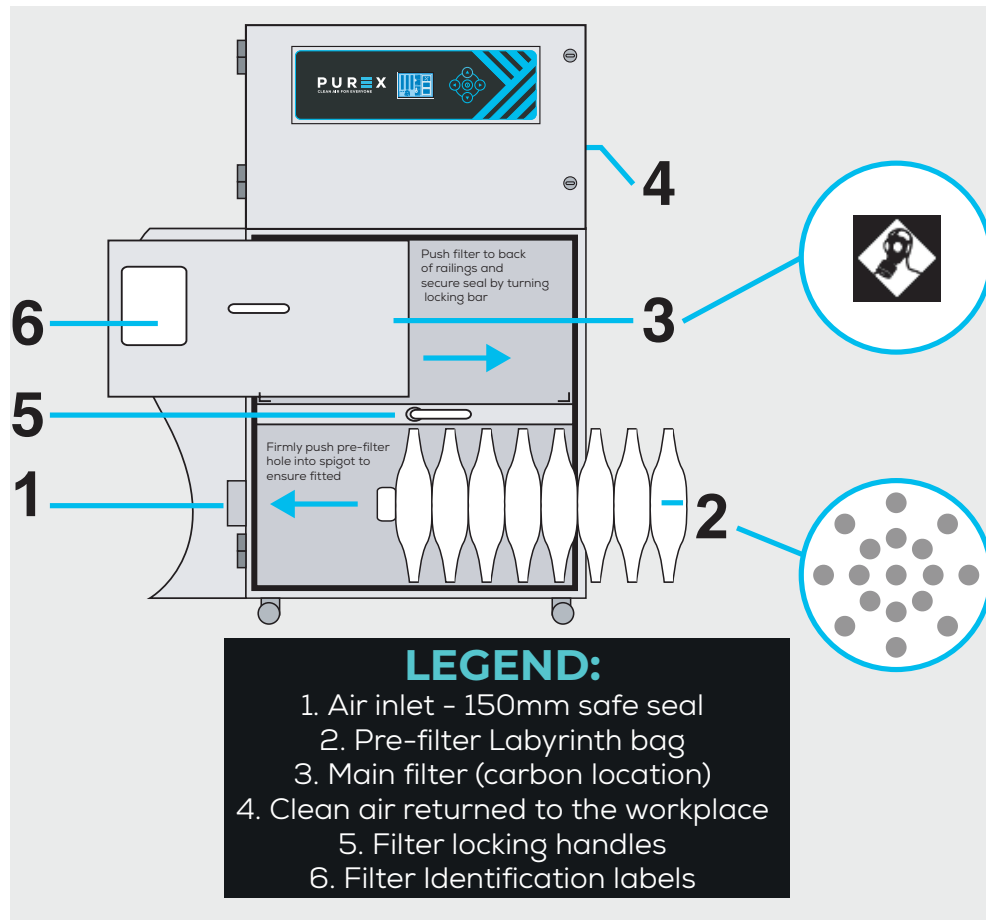

- LEGEND:**
- 1. Air inlet - 150mm safe seal
  - 2. Pre-filter Labyrinth bag
  - 3. Main filter (carbon location)
  - 4. Clean air returned to the workplace
  - 5. Filter locking handles
  - 6. Filter Identification labels

## Interfacing

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Your Machine

10011010  
↔  
10011010

Extractor

Take a look through our [Interfacing Guide](#) to see our extensive range of options