

ALPHA



The Future of Fume Extraction



FEATURES

- VariColour filter blocked warning system
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Quiet in operation
- Simple to install and easy to relocate

SPECIFICATIONS

| Voltage | 120v | 230v |
|----------------|----------------------|----------------------|
| Part Number | 0AL4103 | 0AL4102 |
| Wattage | 1.1kW | 1.2kW |
| Frequency | 50Hz / 60Hz | 50Hz / 60Hz |
| Cabinet Height | 885mm | 885mm |
| Cabinet Width | 465mm | 465mm |
| Cabinet Depth | 430mm | 430mm |
| Cabinet Weight | 55kg | 55kg |
| Sound Level | <60dBa | <60dBa |
| Airflow | 400m ³ /h | 400m ³ /h |

INCLUDED AS STANDARD...

FILTERS



Main Filter
Code
113505

Description
HEPA/Chemical



Pre-filter
Code
111085

Description
F6 Labyrinth

Find out more:



www.purex.co.uk



purex@purex.co.uk



+44 (0)1405 746030

CONNECTION KIT

*Connection kit is included
see overleaf for options*

Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

OPTIONS

Main Filter

| Code: | Description: |
|---------|-----------------------------|
| 113505H | HEPA/Chemical (Hydrophobic) |
| 113579 | HEPA/Twin Chemical |
| 113668 | HEPA/Twin Chemical |
| 113512 | HEPA/Chemical (Cleanroom) |
| 113669 | HEPA/Chemical (Cleanroom) |
| 113508 | Chemical |
| 113809 | HEPA |
| 113513 | Solvent Lock |

Main Filter

| Code: | Description: |
|---------|------------------|
| 113662 | Chemical Special |
| 113505P | Chemical Special |
| 113531 | Pleated Bag |

Pre-filter

| Code: | Description: |
|--------|-----------------|
| 111095 | F8/F9 Labyrinth |

Connection Kits

Hose End
Diameter

Hose
Length


Purex Inlet
Diameter

Code: 100032

50mm

3m

80mm




Code: 100043

50mm

6m

80mm




Code: 120293

80mm

1.3m

80mm




Code: 120288

100mm


2.3m

80mm

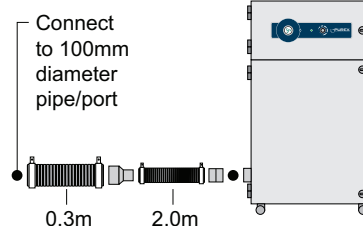

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Purex International Limited
QWP House, Island Drive
Capitol Park, Thorne
Doncaster, UK
DN8 5UE